

Argus 3000

The power to control

PN: PWUP-LI300AG-CG01B

EAN: 6422956007799

Specifications

Capacity	3000 VA / 1800 W
Type	Line-interactive
Input	
Nominal Voltage	230 VAC
Accepted Voltage Range	165 - 276 VAC
Frequency Range	50Hz ~ 60 Hz (Auto sensing)
Output	
Nominal Voltage	230 VAC
AC Voltage Regulation (Batt. Mode)	±10%
Frequency Range (Batt. Mode)	50 Hz or 60Hz ± 1 Hz
Power Factor	≥ 0.6 @ nominal voltage (100% load)
Waveform (Batt. Mode)	Pure sine wave
Transfer Time	Typical 4 ms
Overload Protection	Inner firmware protection
AVR	
Type	1 Boost / 1 Buck
Indicators type	
LCD Display	Load level, Battery level, AC mode, Battery mode and Fault indicators
Alarm	Load Capacity, Load & Battery level, AC mode, Battery mode and Fault indicators, etc.
Protection	
Outlets type	8 x IEC C13 Battery Backup & Surge Protection
Full protection	Overload, deep discharge, Overcharge, Over-Voltage, High Temperature, Input spike protection
Environment	
Humidity	0-90 % (non-condensing)
Temperature	0-40°C
Noise level	Less than 50dB



8 x IEC C13 outlets with protection



LCD Display



Pure sine wave output

- Pure sine wave output
- Line-interactive
- Auto restart while AC is recovering
- Auto-Charge
- Boost and buck AVR for voltage stabilization
- Software management
- Off-Mode Charging
- Cold start function
- Emergency power off function (EPO)
- Generator Compatible
- Smart SNMP card supported
- Rack design

Battery

Battery Type & Number	12V 7.5Ah x 4
Battery Voltage	12V
Typical Recharge Time	6 hours up to 90% capacity
Charging Voltage	27.7 Vdc
Battery Compatibility	PW75123
Running time on battery (minutes)	25% Load - 18 min 50% Load - 7.5 min 75% Load - 4 min 100% Load - <2 min

Management

Connection port	RS232, HID USB, RJ45/RJ11, Intelligent Port (not included in the package)
Software	Online download http://www.powermonitor.software/
Software capability	Monitor & Control over USB, LAN and Internet (SNMP card optional)




Physical

Product dimensions	400 x 438 x 88 mm - 2U
Product weight	22 kg
Retail Pack Dimensions	542 x 560 x 218 mm
Retail Pack Weight	23.6 kg



Running time on battery

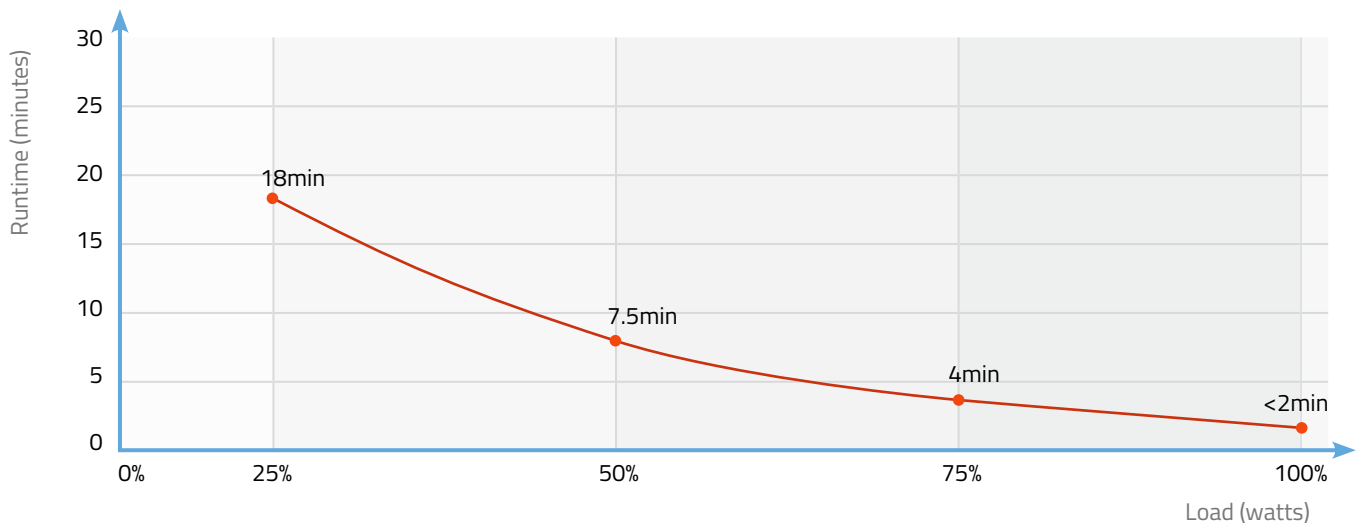

Logistics

Carton Box Size (LxWxH)	542 x 560 x 218 mm
Pieces in the Carton Box	1
Net & Gross weight / CTN	N.W.: 22 kg / G.W.: 23.6 kg



Certificates

RoHS  

