

Camera Bullet de exterior cu senzor de 2 MP si lentila varifocala




Functii cheie

- 2 MP cu senzor performant CMOS
- rezolutie 1920 × 1080
- lentila varifocala de 2.8mm - 12mm
- Switch zi/noapte
- Smart IR, pana la 40 m
- camera 4 in 1 (comutabil pe TVI/AHD/CVI/CVBS)
- IP66

Fisa tehnica

Camera	
Senzor	2 MP CMOS
Semnal	PAL
Rezolutie	1920 (H) × 1080 (V)
Iluminare minima	0.01 Lux@(F1.2, AGC ON), 0 Lux cu IR
Shutter	1/25 (1/30) s to 1/50,000 s
Lentila	2.8 mm - 12 mm
Unghi de vizualizare	111.5° pana la 33.4°
Montura	Φ14
Zi & Noapte	Filtru IR-cut
Ajustare in functie de:	Pan: 0° la 360°, Tilt: 0° la 90°, Rotation: 0° la 360°
Sincronizare	Sincronizare interna
Cadre pe secunda	25 FPS @ 1080P
Meniu	
AGC	Ridicat/Mediu/Sczut/Oprit
3D DNR	Da
BLC	Da
DWDR	Da
Limba	Engleza
Functii	Brightness, Sharpness, Mirror, Smart IR
AGC	Ridicat/Mediu/Sczut/Oprit
Interfata	
Iesire Video	1 output analog HD
Comutabil	TVI/AHD/CVI/CVBS
General	
Temperatura optima	-40 °C to 60 °C (-40 °F to 140 °F), Umiditate: 90%)
Alimentare	12 VDC ±15%
Consum	Max. 4.8 W
Index de protectie	IP66
Material	partea din fata: Metal corp principal : Plastic brat: Metal
Smart IR	Pana la 40 m
Dimensiuni	256.4 mm × 83.3 mm × 78.2 mm
Greutate	605 g

Dimensiuni

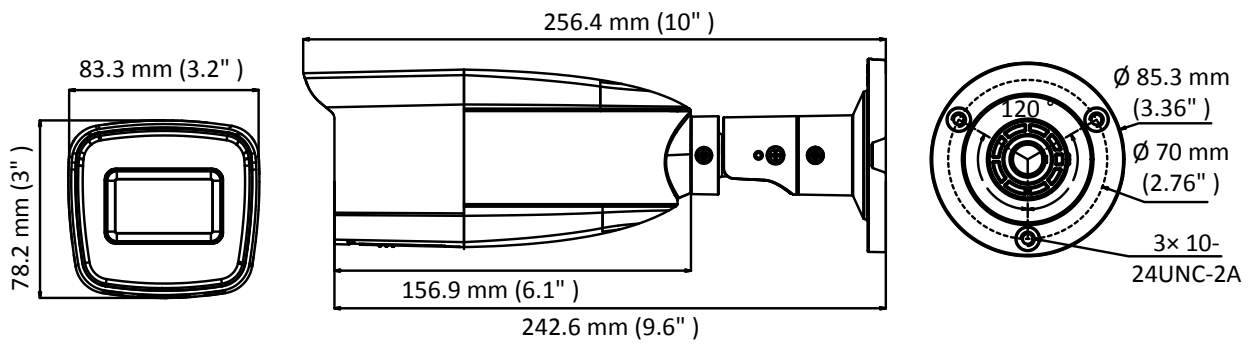

Accesorii compatibile



DS-1275ZI-SUS
Vertical Pole Mount



DS-1276ZI-SUS
Corner Mount



DS-1280ZI-S
Junction Box



DS-1H18
Video Balun