


Camera Bullet de exterior cu senzor de 5 MP, zoom motorizat si infrarosu la 40 de metri

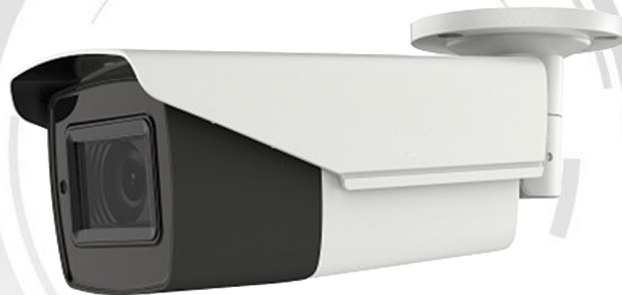

Functii cheie

- 5 MP cu senzor performant CMOS
- rezolutie 2560 × 1944
- lentila varifocala 2.7-13.5mm cu zoom motorizat
- meniu OSD, 2D Dnr, DWDR
- EXIR 2.0, smart IR pana la 40 metri
- camera 4 in 1 (comutabil pe TVI/AHD/CVI/CVBS)
- IP67

Fisa tehnica

Camera	
Senzor	5 MP CMOS
Semnal	PAL
Rezolutie	2560 (H) × 1944 (V)
Iluminare minima	0.01 Lux@(F1.2, AGC ON), 0 Lux cu IR
Shutter	1/25 (1/30) s to 1/50,000 s
Lentila	2.7-13.5 mm
Unghi de vizualizare	95-27°
Montura	M14
Zi & Noapte	IR cut filter
Ajustare in functie de:	Pan: 0° la 360°, Tilt: 0° la 90°, Rotation: 0° la 360°
Sincronizare	Sincronizare interna
Cadre pe secunda	20 FPS @ 5MP, 25 FPS @ 4 MP, 25 FPS @ 1080P
Meniu	
AGC	Ridicat/Mediu/Sczut/Oprit
2D DNR	Da
BLC	Da
DWDR	Da
Limba	Engleza
Functii	Brightness, Sharpness, Mirror, Smart IR
AWB	Da
Interfata	
Iesire Video	1 output analog HD
Comutabil	TVI/AHD/CVI/CVBS
General	
Temperatura optima	-40 °C to 60 °C (-40 °F to 140 °F), Umiditate: 90%)
Alimentare	12 VDC ±15%
Consum	Max. 6.3 W
Index de protectie	IP67
Material	Plastic / Metal
Smart IR	Pana la 40 m
Dimensiuni	84.5 mm × 92 mm × 255.1 mm
Greutate	665 g

Dimensiuni

