

Camera Bullet de exterior cu senzor de 2 MP



Functii cheie




- 2 MP cu senzor performant CMOS
- rezolutie 1920 × 1080
- lentila fixa de 2.8 mm
- filtru IR cut
- smart IR, pana la 20 m
- camera 4 in 1 (comutabil pe TVI/AHD/CVI/CVBS)
- IP66

Fisa tehnica

Camera	
Senzor	2 MP CMOS
Semnal	PAL
Rezolutie	1920 (H) × 1080 (V)
Iluminare minima	0.01 Lux@(F1.2, AGC ON), 0 Lux cu IR
Shutter	1/25 (1/30) s to 1/50,000 s
Lentila	2.8 mm
Unghi de vizualizare	103° (2.8 mm)
Montura	M12
Zi & Noapte	IR cut filter
Ajustare in functie de:	Pan: 0° la 360°, Tilt: 0° la 180°, Rotation: 0° la 360°
Sincronizare	Sincronizare interna
Cadre pe secunda	25 FPS @ 1080P
Meniu	
AGC	Ridicat/Mediu/Scazut/Oprit
3D DNR	Da
BLC	Da
DWDR	Da
Limba	Engleza
Functii	Brightness, Sharpness, Mirror, Smart IR
AGC	Ridicat/Mediu/Scazut/Oprit
Interfata	
Iesire Video	1 output analog HD
Comutabil	TVI/AHD/CVI/CVBS
General	
Temperatura optima	-40 °C to 60 °C (-40 °F to 140 °F), Umiditate: 90%)
Alimentare	12 VDC ±15%
Consum	Max. 4 W
Index de protectie	IP66
Material	Plastic
Smart IR	Pana la 20 m
Dimensiuni	165 mm × 62 mm × 58 mm (6.50" × 2.44" × 2.28")
Greutate	150 g (0.33 lb.)



Dimensiuni

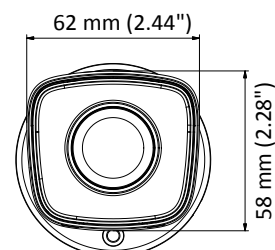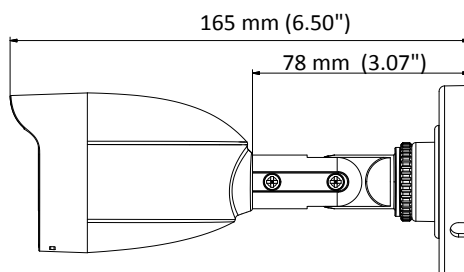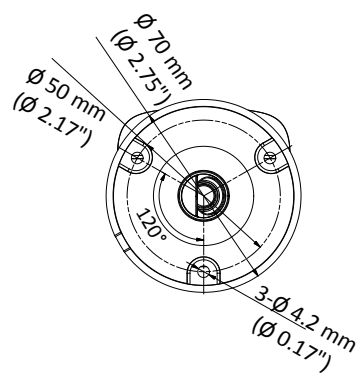

Accesorii pentru montaj



HIA-J101
Junction Box