

## Camera Bullet de exterior cu senzor de 5 MP si infrarosu la 20 de metri



### Functii cheie


- 5 MP cu senzor performant CMOS
- rezolutie 2560 × 1944
- lentila fixa de 2.8 mm
- meniu OSD, 2D Dnr, DWDR
- smart IR, pana la 20 m
- camera 4 in 1 (comutabil pe TVI/AHD/CVI/CVBS)
- IP67

## Fisa tehnica


<b>Camera</b>	
Senzor	5 MP CMOS
Semnal	PAL
Rezolutie	2560 (H) × 1944 (V)
Iluminare minima	0.01 Lux@(F1.2, AGC ON), 0 Lux cu IR
Shutter	1/25 (1/30) s to 1/50,000 s
Lentila	2.8 mm
Unghi de vizualizare	85°
Montura	M12
Zi & Noapte	IR cut filter
Ajustare in functie de:	Pan: 0° la 360°, Tilt: 0° la 180°, Rotation: 0° la 360°
Sincronizare	Sincronizare interna
Cadre pe secunda	20 FPS @ 5MP, 25 FPS @ 4 MP, 25 FPS @ 1080P
<b>Meniu</b>	
AGC	Ridicat/Mediu/Sczut/Oprit
2D DNR	Da
BLC	Da
DWDR	Da
Limba	Engleza
Functii	Brightness, Sharpness, Mirror, Smart IR
AWB	Da
<b>Interfata</b>	
Iesire Video	1 output analog HD
Comutabil	TVI/AHD/CVI/CVBS
<b>General</b>	
Temperatura optima	-40 °C to 60 °C (-40 °F to 140 °F), Umiditate: 90% )
Alimentare	12 VDC ±15%
Consum	Max. 4.3 W
Index de protectie	IP67
Material	Plastic
Smart IR	Pana la 20 m
Dimensiuni	58 mm × 61 mm × 163 mm
Greutate	180 g



## Dimensiuni

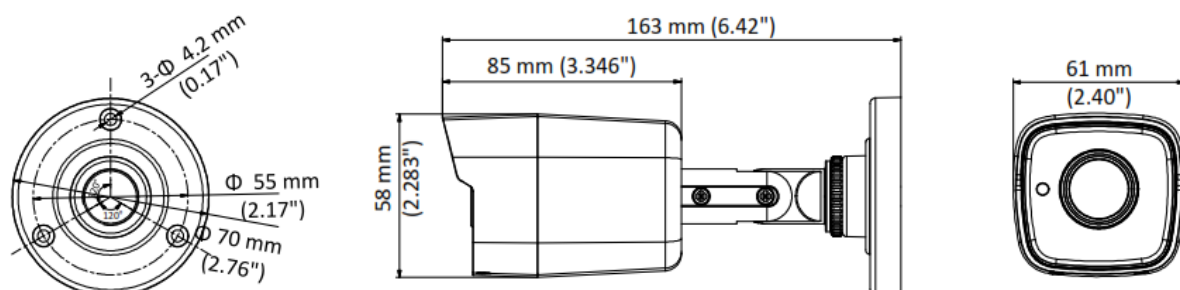

## Accesorii compatibile

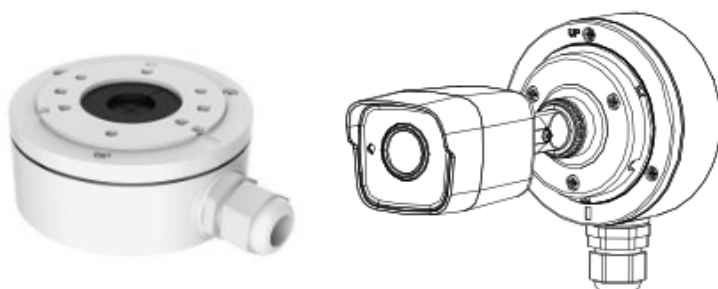

DS-1280ZJ-XS Junction Box